



| RELEASE NUMBER | REV LTR | REVISION DESCRIPTION | BY  | DATE     | APPD |
|----------------|---------|----------------------|-----|----------|------|
| P40356-08      | A       | INITIAL RELEASE      | JPB | 10/29/10 | JPD  |
|                |         |                      |     |          |      |
|                |         |                      |     |          |      |

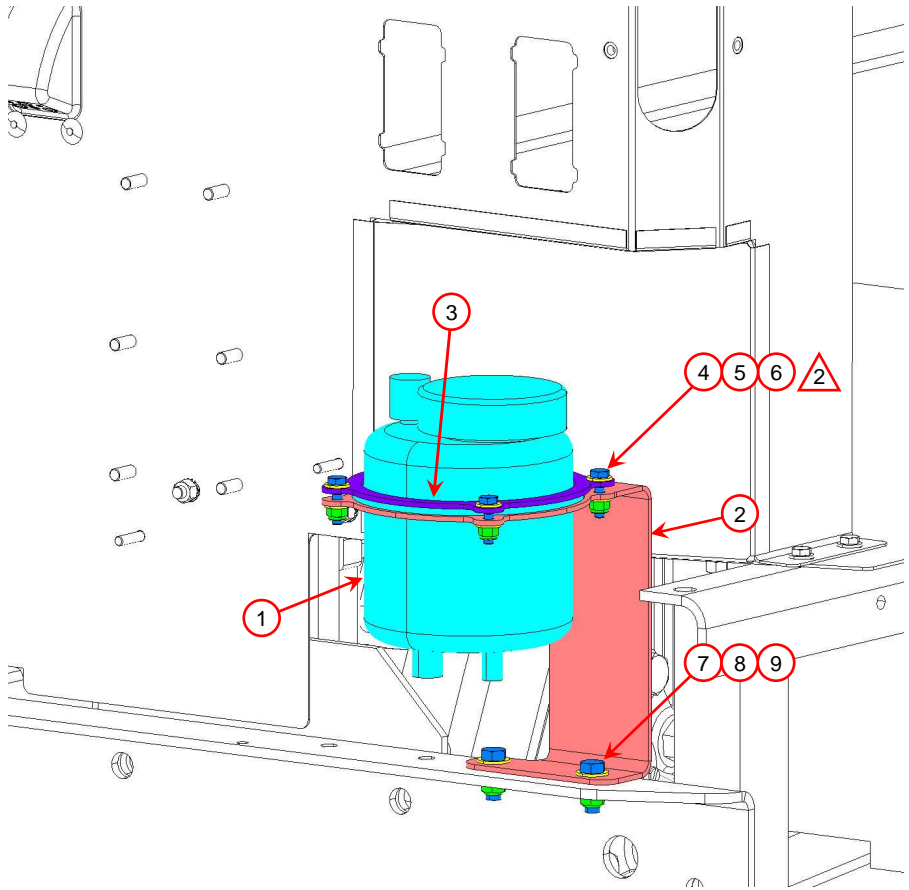

| BILL OF MATERIAL |              |            |                                     |     |
|------------------|--------------|------------|-------------------------------------|-----|
| REF #            | FTL PART #   | TBB PART # | DESCRIPTION                         | QTY |
| 1                | TBB61320187  | 61320187   | RESERVOIR, REMOTE PWR STRG          | 1   |
| 2                | TBBN170282   | 170282     | BRKT-RES, STRG, EF, ISB, EURO IV    | 1   |
| 3                | TBBN170300   | 170300     | PLT-RES, STRG, EF, ISB, EURO IV     | 1   |
| 4                | 23-11743-100 | 61370803   | SCREW-CAP, HEX, 1/4-20 UNC          | 4   |
| 5                | 23-10900-025 | 61370348   | WASHER, FLAT, SST, 1/4"             | 8   |
| 6                | 23-09336-006 | 61370078   | NUT-HEX, CLR, LK, 1/4-20            | 4   |
| 7                | 23-11747-100 | 61370825   | SCREW-CAP, HEX, 3/8-16, GR8, ZN, 1" | 2   |
| 8                | 23-09114-002 | 61370350   | WASHER-HRDN, 0.41X0.81X.080, ZN     | 4   |
| 9                | 23-13175-106 | 61370041   | NUT-HEX, PT, 3/8-16, C, CD., 337    | 2   |

1. TORQUE FASTENERS PER SPEC 49-00104 UNLESS OTHERWISE SPECIFIED.
-  2. TORQUE FASTENERS UNTIL RESERVOIR IS SECURED BETWEEN THE RESERVOIR BRACKET AND MOUNTING PLATE. DO NOT OVER TORQUE FASTENERS AS IT COULD DAMAGE THE RESERVOIR.
3. HYDRAULIC RESERVOIR MUST MEET DTNA CLEANLINESS AND PERFORMANCE REQUIREMENTS PER SPEC 49-00226.
4. TBB ECR/CR NUMBER: CR\_F6833-8

|   |   |      |  |                        |
|---|---|------|--|------------------------|
| ITEM NUMBER<br>TBBN170281<br>DESCRIPTION<br>INSTL-RES, STRG, EF, ISB, EURO IV | <b>DAIMLER</b>  |      | Daimler Trucks<br>North America  |                        |
|   | THE INFORMATION CONTAINED HEREIN IS PROPRIETARY DATA, AND IS NOT FOR DISSEMINATION OR DISCLOSURE, IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUBMITTED, EXCEPT AS AUTHORIZED IN WRITING BY DAIMLER TRUCKS NORTH AMERICA LLC (DTNA). |      |  |                        |
|   | MATERIAL APPROVAL   | DATE | UNLESS OTHERWISE NOTED, DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ASME Y14.5M-1994, WITH EXCEPTION PER DTNA 09ENG-WI037 |                        |
|   | DRAWN BY  | DATE |  |                        |
|   | CHECKED BY  | DATE |  |                        |
|   | RESPONSIBLE ENGINEER  | DATE |  |                        |
|   | APPROVED BY   | DATE |  |                        |
|   | DESCRIPTION   | DATE | THIRD ANGLE PROJECTION   | UNITS OF MEASURE<br>MM |
|   | <b>INSTL-RES, STRG, EF, ISB, EURO IV</b><br>SUPPLEMENTAL DESCRIPTION 534A1  |      |  |                        |
|   | ITEM/DRAWING NUMBER<br><b>TBBN170281</b>  |      | REVISION LETTER<br><b>A</b>  | PAGE<br>1 of 1         |